

PUBLISHED: 22-JAN-2020  
2020.0 DEFENDER (LE), 501-08

EXTERIOR TRIM AND ORNAMENTATION

RADIATOR GRILLE ( G 2 3 4 4 7 6 7 )

REMOVAL AND INSTALLATION

76.55.03	RADIATOR GRILLE - RENEW	ALL DERIVATIVES	0.30	USED WITHINS	+
----------	-------------------------------	--------------------	------	--------------	---

REMOVAL


CAUTION:

Take extra care not to damage the surrounding components.

NOTE:


- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1.

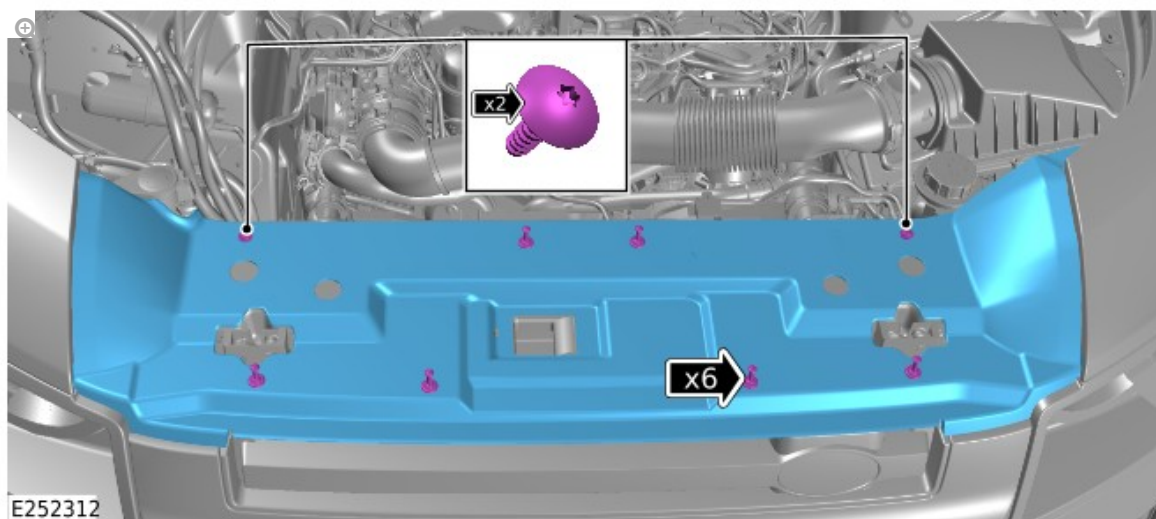


- Release the 6 clips.
- Remove the 2 bolts.
- Remove the upper radiator grille panel.

2.

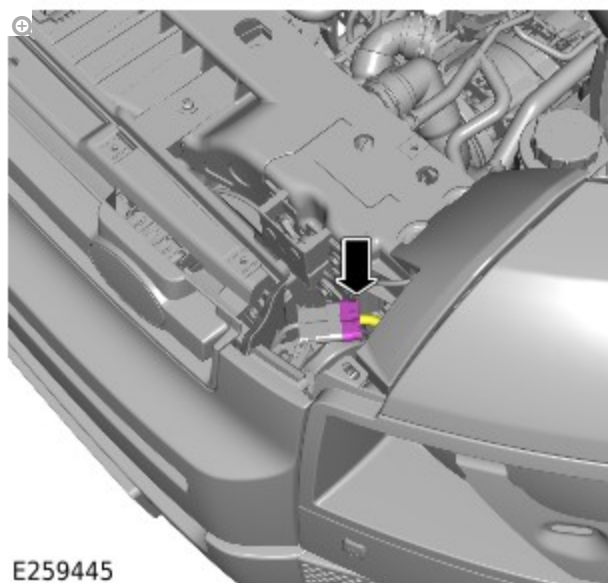

Disconnect the electrical connector.

3.

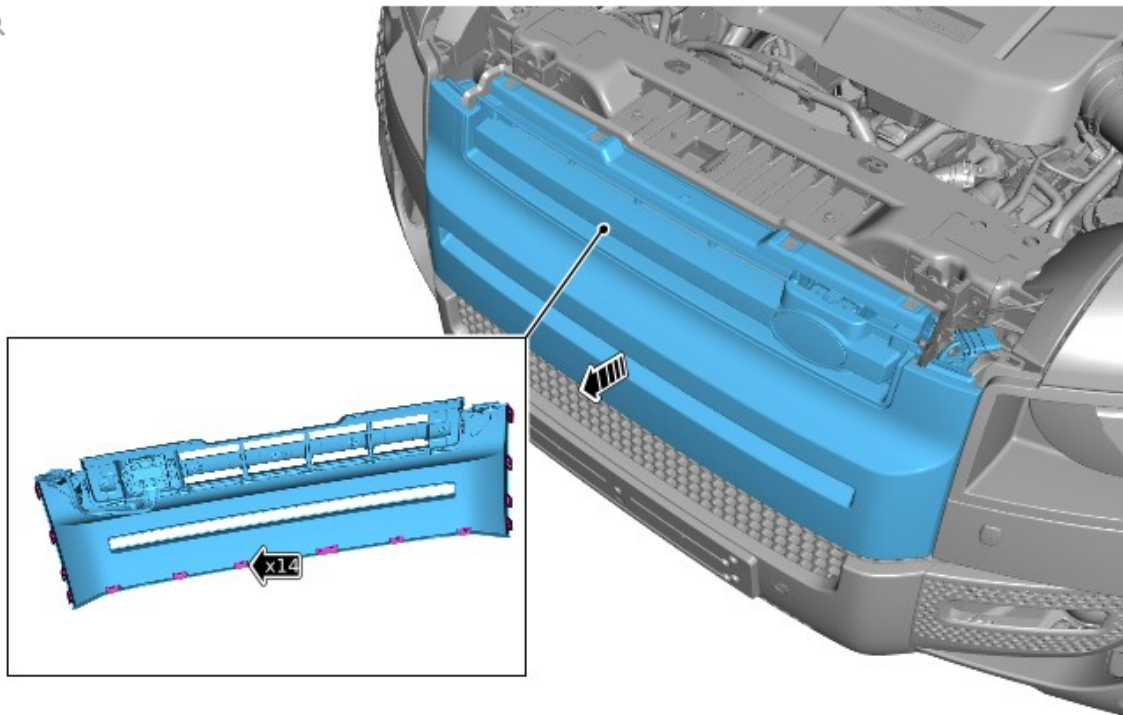


E248387

- Release the 14 clips.
- Remove the radiator grille.

4.


**NOTE:**

Do not disassemble further if component if removed for access only.

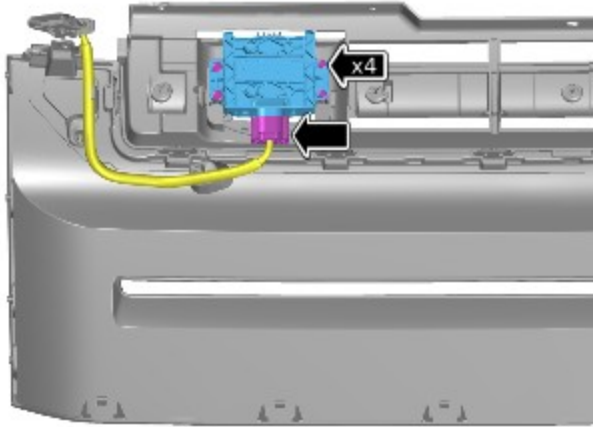**E252512**


- Disconnect the electrical connector.
- Remove the 4 bolts.
- Remove the Cruise Control Module (CCM).

5.

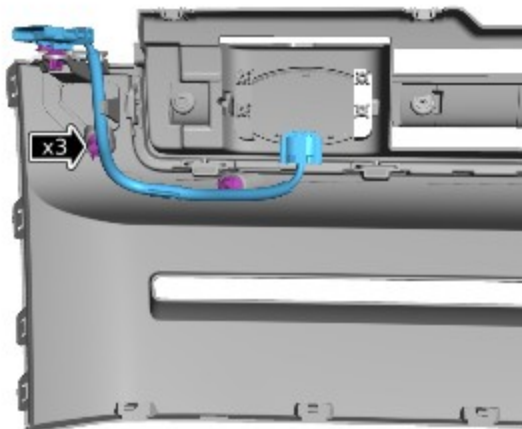**E260312**

- Release the 3 clips.
- Remove the wiring harness.

6.

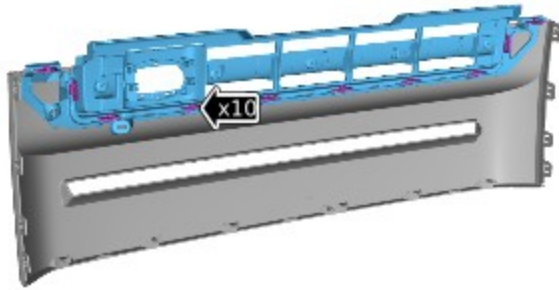**E248388**

- Release the 10 clips.
- Remove the upper grille.

---

## INSTALLATION

---

1.

**NOTE:**

Steps 1 - 3 are only required if the components were previously removed.

- Install the 10 clips.
- Install the upper grille.

2.

- Install the 3 clips.
- Install the wiring harness.

3.

- Install the CCM.
- Install and tighten the 4 bolts.  
*Torque: 3Nm*
- Connect the electrical connector.

4.

- Install the 14 clips.
- Install the radiator grille.

- 
5. Connect the electrical connector.
- 

- 6.
- Install the upper radiator grille panel.
  - Install the 6 clips.
  - Install the 2 bolts.

*Torque: **3Nm***